

ROYALFIL GS 41 B3 (E90T5-B3 C)

AWS A / SFA 5.29 E90T5-B3 CEN ISO 17634 A TCrMo2BC3H5


Applications

Royalfil GS-41B3 is designed for welding of creep-resisting 2.25% Cr & 1% Mo steel in flat and horizontal position. It is used for welding of high temperature, creep resistant Cr-Mo alloy boiler plates, pressure pipes and other pressure vessel applications. Suitable for joining steels conforming to ASTM Grade F22 of SA-182/ SA-182M & SA-336/ SA-336M, Grade T4, T22 of SA-199 / SA-199M, Grade P22 of SA-335/SA-335M etc.

Characteristics on Usage

Royalfil GS-41B3 is basic flux cored wire having stable and smooth arc with good slag detachability. This wire is designed for welding of creep-resisting 2.25% Cr & 1% Mo steels. It is used for flat & horizontal welding with CO₂ shield. Weld metal is of radiographic quality.

Welding Positions

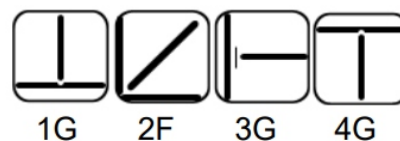

Recommended Stick Out
15-20mm

OutShielding Gas

Carbon Dioxide (CO₂) shielding
Gas Flow: 15-20 Lit/Min.

Chemical Composition Of Weld Metal

C%	Mn%	Si%	S%	P%
0.05 -0.12	1.25 Max	0.80 Max	0.030 Max	0.030 Max
Cr%	Mo%			
2.00-2.50	0.90-1.20			

Mechanical Properties Of Weld Metal

U.T.S. (N/mm ²)	Y.S. (N/mm ²)	ELONGATION (L = 4d) %
620-760	540 Min	17.0 Min

Welding Parameters (DC + VE)

Diameter (mm)	Flat & Horizontal (A)	Flat & Horizontal (V)
1.20	180-250	26-30
1.60	210-280	26-30

Packing

15 kgs. Vacuum packed plastic spool